



444 JAMB
325 FIXED \ CASEMENT OUT
4-BAR ARMS

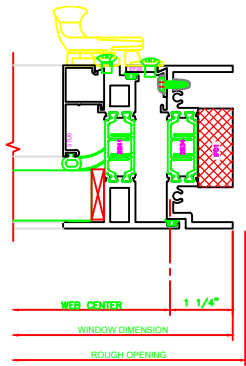


445 JAMB
325 FIXED \ CASEMENT OUT
CAM LOCKS

13 ERECTOR NOTE
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONCRETE THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.




446 JAMB
325 FIXED \ CASEMENT OUT
BUTT HINGES

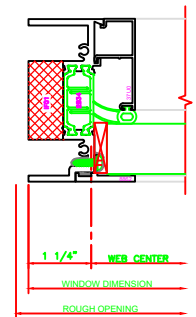


403 JAMB
325 PROJECT OUT \ FIXED


140 HEAD
325 CASEMENT OUT
4-BAR ARM

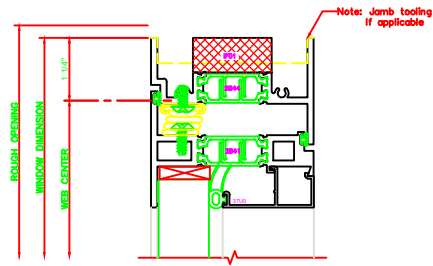


141 HEAD
325 CASEMENT OUT
BUTT HINGES



542 MEETING RAIL
325 CASEMENT OUT \ FIXED
4-BAR ARMS



543 MEETING RAIL
325 CASEMENT OUT \ FIXED
BUTT HINGES



200 SILL
325 FIXED

