









SYSTEM 8250 2-1/2" UNITIZED CURTAIN WALL

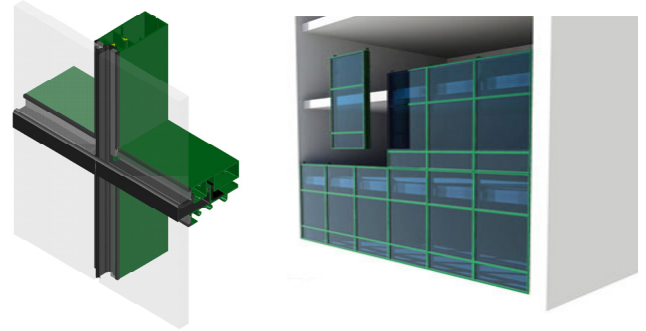

2 or 4-sided Captured/Pressure Glazed • 2 or 4-sided Structural Silicone Glazed

The 8250 is a versatile unitized curtain wall system that can be provided in stock lengths, pre-glaze capability for customers and factory fabricated/assembled & glazed. The 8250 provides outstanding thermal performance without sacrificing structural integrity.



<p>STRUCTURAL LOAD (ASTM E330)</p> <p>VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E547 & E331)</p> <p>15 PSF TARGET</p> 
<p>AIR INFILTRATION (ASTM E283)</p> <p><0.06 CFM/FT²</p> 	<p>CRF (AAMA 1503)</p> <p>CAPTURED: 77 SSG: 79</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200)</p> <p>CAPTURED: 0.26 - 0.49 SSG: 0.28 - 0.51</p> 	<p>OITC* (ASTM E90 & E413)</p> <p>N/A</p> 
<p>STC* (ASTM E90 & E413)</p> <p>N/A</p> 	

STANDARD FEATURES

- 2-1/2" sightlines
- +/- 1/2" movement
- 90° inside and outside corners
- Integral vent options (875X)
- EPDM gaskets
- Up to 1-5/16" glazing infill
- Factory glaze capable

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.