









# SYSTEM 8750 XD 3" x 7-1/2" UNITIZED CURTAIN WALL

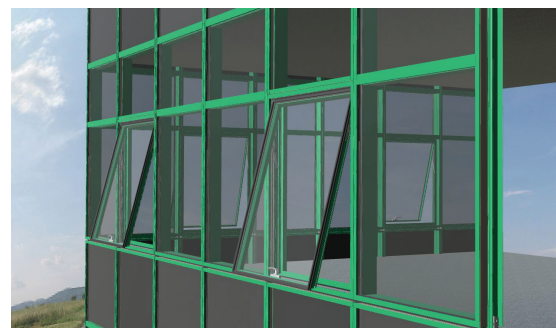

2 or 4-sided Captured/Pressure Glazed • 2 or 4-sided Structural Silicone Glazed

EFCO's 8750XD Unitized Curtain Wall is the latest addition to our XTherm® family of products. The 8750XD offers an industry leading U-Factor which is not compromised when the 875X Wall Vent is added. The combination of popular system profiles, dry glazed or 2 & 4 sided SSG and integral vents, offers outstanding design and flexibility. While improved manufacturability with fewer parts and pieces, simplifies fabrication and ease of installation.



|  |   |
|--|---|
| <b>STRUCTURAL LOAD</b><br><small>(ASTM E330)</small><br>VISIT <a href="http://EFCOCORP.COM">EFCOCORP.COM</a>  | <b>WATER RESISTANCE</b><br><small>(ASTM E547 &amp; E331)</small><br>15 PSF TARGET  |
| <b>AIR INFILTRATION</b><br><small>(ASTM E283)</small><br><0.06 CFM/FT <sup>2</sup>                            | <b>CRF</b><br><small>(AAMA 1503)</small><br>CAPTURED: 82<br>SSG: 79                |
| <b>U-FACTOR*</b><br><small>(ANSI/NFRC 100/200)</small><br>CAPTURED: 0.27 - 0.49<br>SSG: 0.28 - 0.51           | <b>OITC*</b><br><small>(ASTM E90 &amp; E413)</small><br>CAPTURED: 30<br>SSG: 30    |
| <b>STC*</b><br><small>(ASTM E90 &amp; E413)</small><br>CAPTURED: 35<br>SSG: 35                                |   |

## STANDARD FEATURES

- 3" sightlines
- 7-1/2" system depth
- 90° inside and outside corners
- Triple glazed performance with double glazing
- Integral vent options (875X)
- Dry glazed
- U-Factor of .30 with .24 COG glass
- Frame CRF of 82
- Rain screen design
- +/- 1/2" movement
- Estimated 45% reduction of fabrication
- Up to 1-5/16" glazing infill
- Thermal door frames

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.