


869	HEAD
	5600
	6


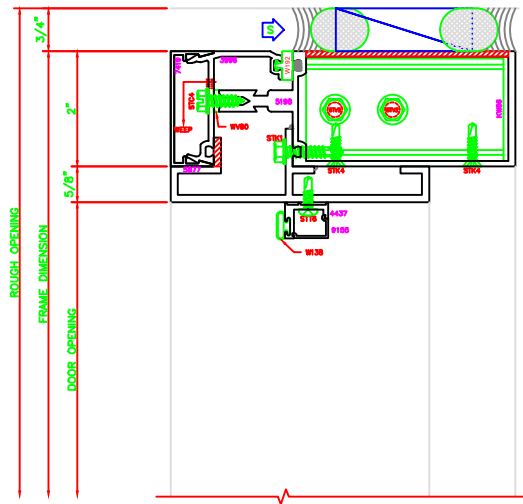


866	HEAD
	5600
	6

ERASE NOTE:
OUTSWING HEAD FOR SURFACE CLOSERS

870	JAMB
	5600
	6

871	JAMB
	5600
	6

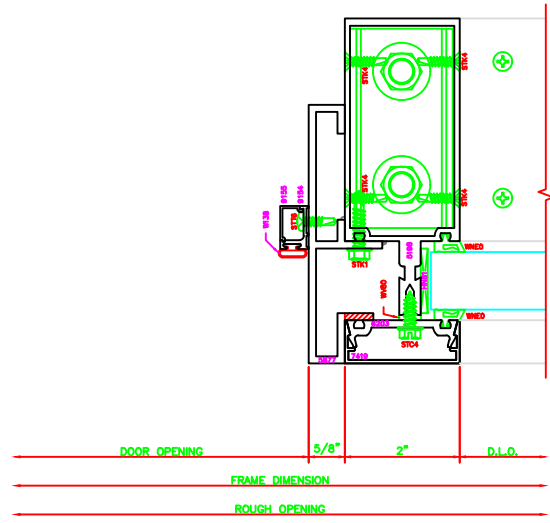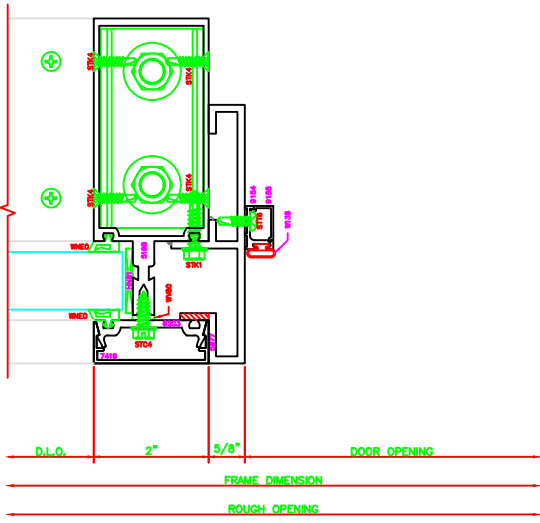

867	JAMB
	5600
	6

868	JAMB
	5600
	6

ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK BEFORE SETTING MULLION IN PLACE.

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 4437/9155/STT6/W138

