



601 XO MTD. RAIL  
 1/2" x 1/2" x 1/2"







601 XO MTD. RAIL  
 1/2" x 1/2" x 1/2"



400 OPERABLE JAMB  
 1/2" x 1/2" x 1/2"

600 XO MTD. RAIL  
 1/2" x 1/2" x 1/2"

401 FIXED JAMB  
 1/2" x 1/2" x 1/2"

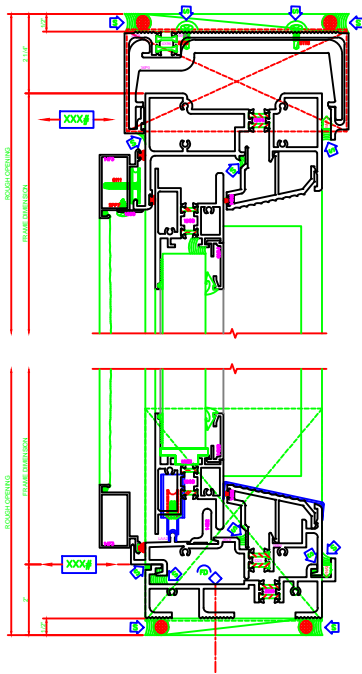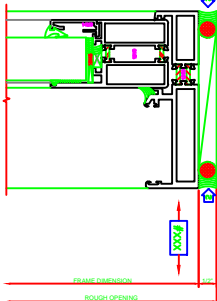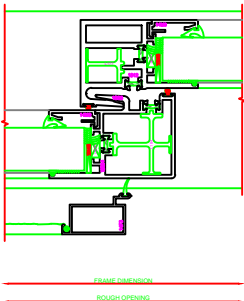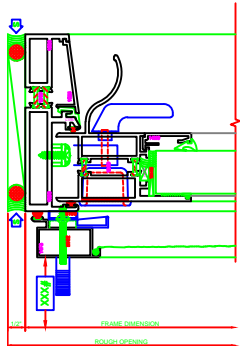

101 OPERABLE HEAD  
 1/2" x 1/2" x 1/2"


ERECTOR NOTE:  
 FASTENER HEADS MUST BE COVERED WITH  
 SEALANT TO INSURE A WEATHER-TIGHT SEAL.  
 (TYPICAL)

ERECTOR NOTE:  
 SHIP THE SILL WITH FLASHING INTERNAL  
 GASKET BY ERECTOR. SEAL AND GUM TO  
 INTERNAL WITH SEAL AND GUM TO  
 CONDITION PER ERCO CORP. SLIDING GLASS  
 DOOR INSTALLATION INSTRUCTIONS.  
 SUBFRAME SECTION (TYPICAL)

ERECTOR NOTE:  
 SILLERS MUST BE SET IN A BED OF  
 SEALANT TO INSURE A WEATHER-TIGHT SEAL.  
 (INTERNAL AND EXTERNAL) (TYPICAL)

201 OPERABLE SILL  
 1/2" x 1/2" x 1/2"

ERECTOR/CUSTOMER NOTE:  
 ERECTOR WILL BE SUPPLIED WITH A SHOP APPLIED  
 COVER TO PROTECT IT & THE WEATHERSTRIP FROM  
 CONSTRUCTION DAMAGE. COVER WILL NEED TO BE  
 REMOVED TO ACHIEVE FULL WEATHER PERFORMANCE OR  
 OTHER FORM OF DAMAGE IS NO LONGER PROTECTIVE.  
 UNDER ANY CIRCUMSTANCES THE SILL WITH THE PROTECTIVE  
 COVER IN PLACE.

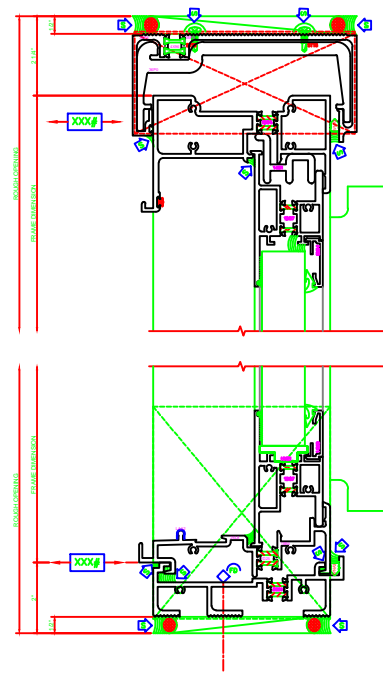

100 FIXED HEAD  
 1/2" x 1/2" x 1/2"

ERECTOR NOTE:  
 FASTENER HEADS MUST BE COVERED WITH  
 SEALANT TO INSURE A WEATHER-TIGHT SEAL.  
 (TYPICAL)

ERECTOR NOTE:  
 SHIP THE SILL WITH FLASHING INTERNAL  
 GASKET BY ERECTOR. SEAL AND GUM TO  
 INTERNAL WITH SEAL AND GUM TO  
 CONDITION PER ERCO CORP. SLIDING GLASS  
 DOOR INSTALLATION INSTRUCTIONS.  
 SUBFRAME SECTION (TYPICAL)

ERECTOR NOTE:  
 SILLERS MUST BE SET IN A BED OF  
 SEALANT TO INSURE A WEATHER-TIGHT SEAL.  
 (INTERNAL AND EXTERNAL) (TYPICAL)

200 FIXED SILL  
 1/2" x 1/2" x 1/2"