



430 JAMB
325 CASEMENT IN
4-BAR ARMS

ERECTOR NOTE:
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.

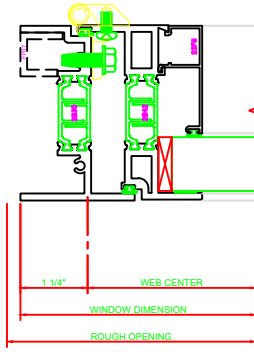


432 JAMB
325 CASEMENT IN BUTT HINGES

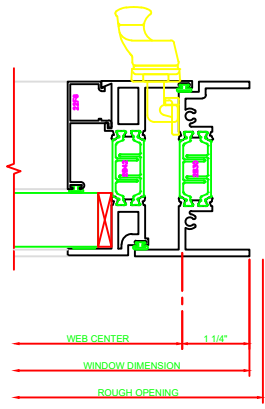

431 JAMB
325 CASEMENT IN CAM LOCK

130 HEAD
325 CASEMENT IN 4-BAR ARM

230 SILL
325 CASEMENT IN 4-BAR ARMS

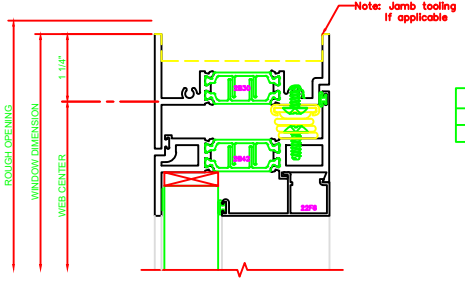

131 HEAD
325 CASEMENT IN BUTT HINGES

231 SILL
325 CASEMENT IN BUTT HINGES

