



**430 JAMB**  
325 CASEMENT IN  
4-BAR ARMS

**ERECTOR NOTE:**  
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.




**432 JAMB**  
325 CASEMENT IN  
BUTT HINGES

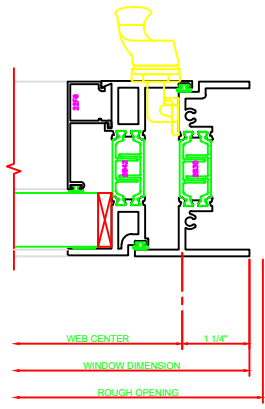

**431 JAMB**  
325 CASEMENT IN  
CAM LOCK

**130 HEAD**  
325 CASEMENT IN  
4-BAR ARM

**230 SILL**  
325 CASEMENT IN  
4-BAR ARMS

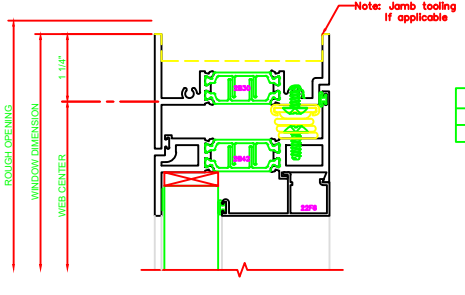

**131 HEAD**  
325 CASEMENT IN  
BUTT HINGES

**231 SILL**  
325 CASEMENT IN  
BUTT HINGES

