




402 JAMB
325
FIXED \ PROJECT IN

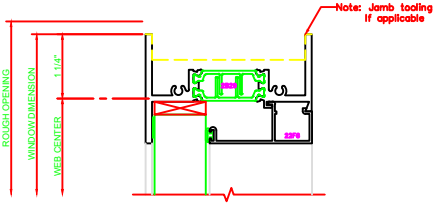


100 HEAD
325
FIXED

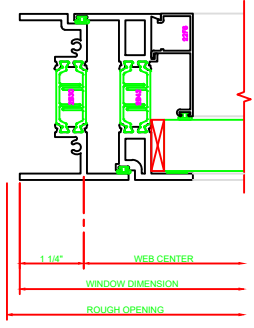


430 JAMB
325
CASEMENT IN
ERECTOR NOTE:
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.

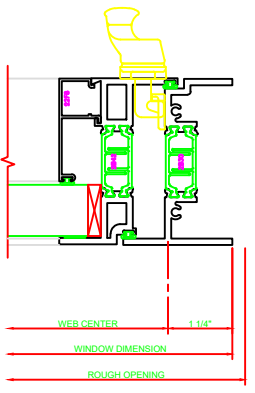


431 JAMB
325
CASEMENT IN
CAM LOCK




432 JAMB
325
CASEMENT IN
BUTT HINGES

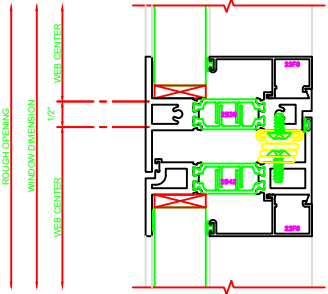

530 MEETING RAIL
325
FIXED \ CASEMENT IN
4-BAR ARMS

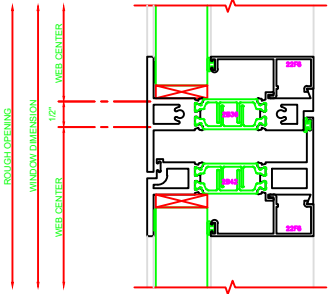


531 MEETING RAIL
325
FIXED \ CASEMENT IN
BUTT HINGES

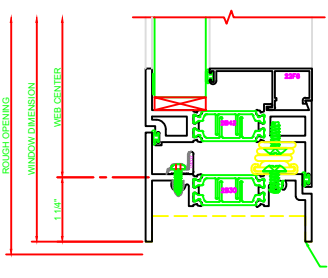

230 SILL
325
CASEMENT IN
4-BAR ARMS

NOTE: JAMB TOOLING IF APPLICABLE

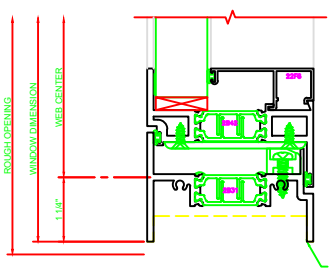

231 SILL
325
CASEMENT IN
BUTT HINGES

NOTE: JAMB TOOLING IF APPLICABLE