



402	JAMB
	325
	FIXED \ PROJECT IN

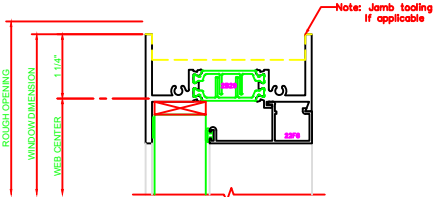


100	HEAD
	325
	FIXED




430	JAMB
	325
	CASEMENT IN

ERECTOR NOTE:
 THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.

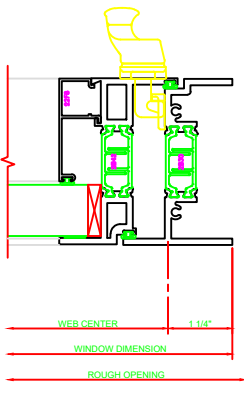


431	JAMB
	325
	CASEMENT IN
	CAM LOCK




530	MEETING RAIL
	325
	FIXED \ CASEMENT IN
	4-BAR ARMS

531	MEETING RAIL
	325
	FIXED \ CASEMENT IN
	BUTT HINGES

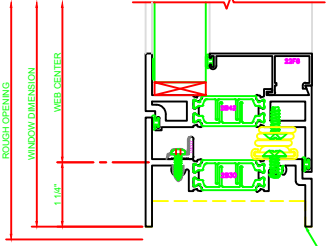


230	SILL
	325
	CASEMENT IN
	4-BAR ARMS

231	SILL
	325
	CASEMENT IN
	BUTT HINGES



432	JAMB
	325
	CASEMENT IN
	BUTT HINGES

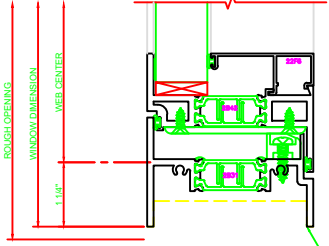

NOTE: JAMB TOOLING IF APPLICABLE