




ERECTOR NOTE:
 THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.




432 JAMB
 325 CASEMENT IN BUTT HINGES

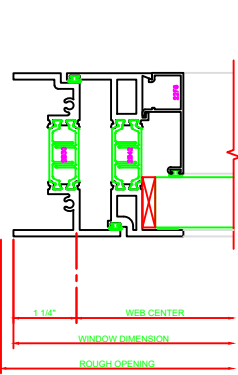

430 JAMB
 325 CASEMENT IN 4-BAR ARMS

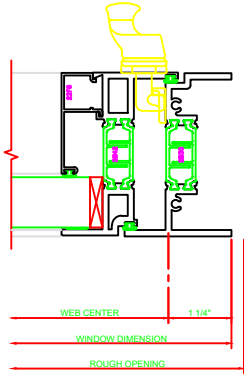


431 JAMB
 325 CASEMENT IN CAM LOCK




402 JAMB
 325 CASEMENT IN FIXED PROJECT IN


130 HEAD
 325 CASEMENT IN 4-BAR ARM

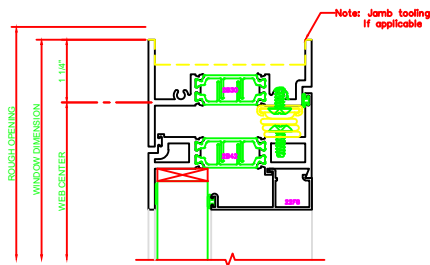


131 HEAD
 325 CASEMENT IN BUTT HINGES

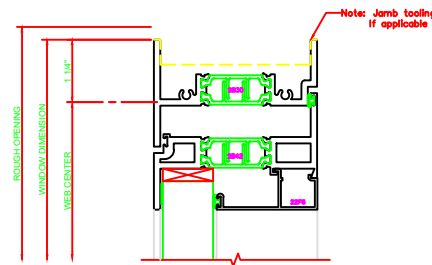


532 MEETING RAIL
 325 CASEMENT IN / FIXED 4-BAR ARMS



533 MEETING RAIL
 325 CASEMENT IN / FIXED BUTT HINGES



200 SILL
 325 FIXED

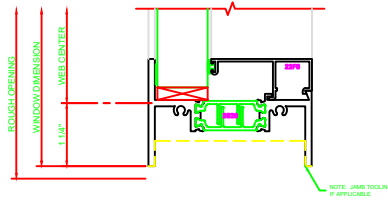

NOTE: JAMB TOOLING IF APPLICABLE