



430	JAMB
	325 CASEMENT IN BUTT HINGES

ERECTOR NOTE:
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.




432	JAMB
	325 CASEMENT IN BUTT HINGES

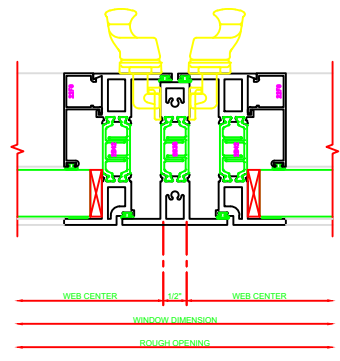


630	MEETING RAIL
	325 C.L. CAM LOCK

130	HEAD
	325 CASEMENT IN 4-BAR ARM

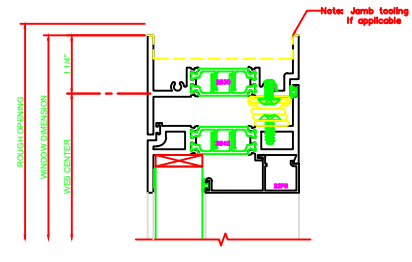


Note: Jamb tooling if applicable

230	SILL
	325 CASEMENT IN 4-BAR ARM

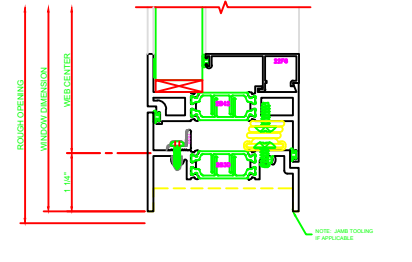


Note: Jamb tooling if applicable

131	HEAD
	325 CASEMENT IN BUTT HINGES

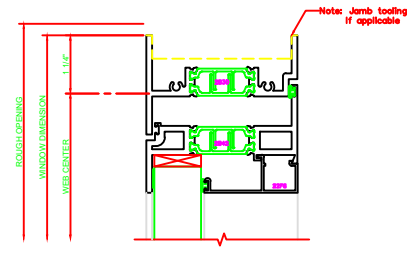

Note: Jamb tooling if applicable

231	SILL
	325 CASEMENT IN BUTT HINGES

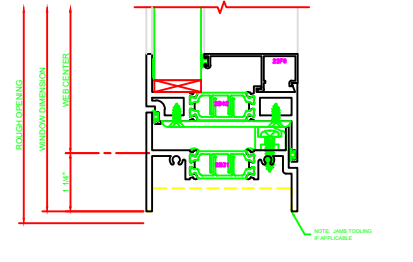

Note: Jamb tooling if applicable