



440	JAMB
	325 CASEMENT OUT
	4-BAR ARM

**RECHECK NOTE:**  
 THE FINISHED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.

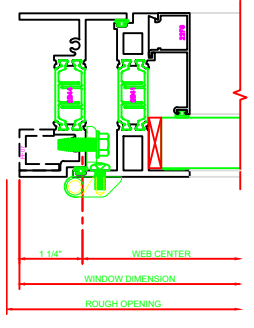


442	JAMB
	325 CASEMENT OUT
	BUTT HINGES

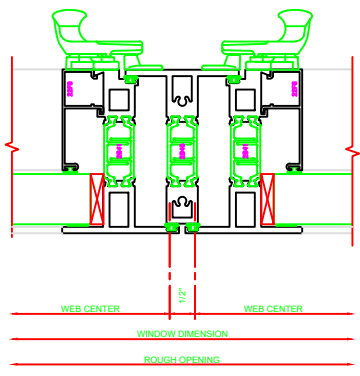


640	MEETING RAIL
	325 CASEMENT OUT
	C.C. LOCKS

140	HEAD
	325 CASEMENT OUT
	4-BAR ARM

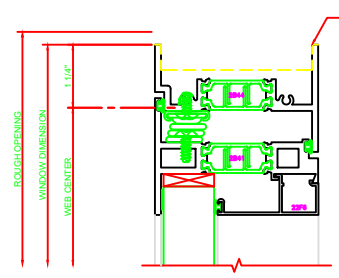


Note: Jamb tooling if applicable

141	HEAD
	325 CASEMENT OUT
	BUTT HINGES




240	SILL
	325 CASEMENT OUT
	4-BAR ARMS

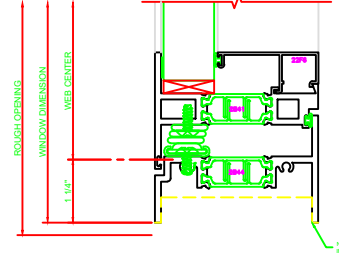

NOTE: JAMB TOOLING IF APPLICABLE

241	SILL
	325 CASEMENT OUT
	BUTT HINGES

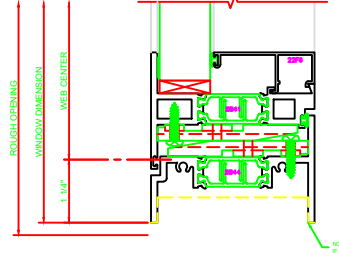

NOTE: JAMB TOOLING IF APPLICABLE