


440 JAMB
 2x4
 PREP | CASSETTE OUT | PRES
 SEE DRAWING NOTE
 THE RIGID JAMB FRAME SHALL BE INSTALLED TO THE CONCRETE. ALL JOISTS SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONCRETE THROUGH THE JOISTS OR AS CLOSE AS POSSIBLE TO THE JOISTS.

442 JAMB
 2x4
 PREP | CASSETTE OUT | BUTT HEADS

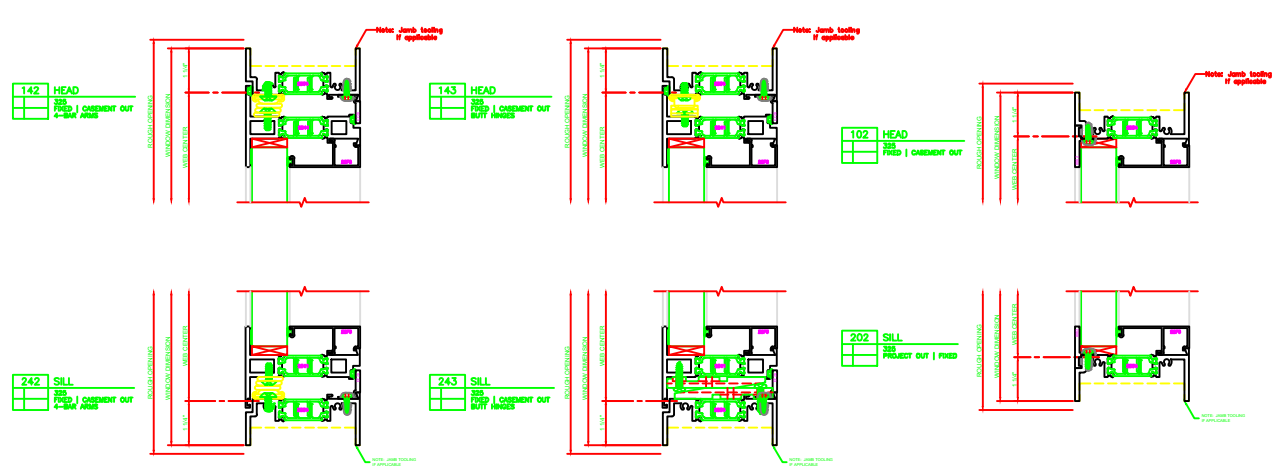

142 HEAD
 2x6
 PREP | CASSETTE OUT | 2x6 BUTT HEADS

143 HEAD
 2x6
 PREP | CASSETTE OUT | 2x6 BUTT HEADS

102 HEAD
 2x6
 PREP | CASSETTE OUT

242 SILL
 2x6
 PREP | CASSETTE OUT | PRES

243 SILL
 2x6
 PREP | CASSETTE OUT | PRES

202 SILL
 2x6
 PREP | CASSETTE OUT | PRES