




440 JAMB
 250
SLIP AND SHUTE
 THE RIGID JAMB FRAME SHALL BE INSTALLED FLUSH. ALL JOISTS SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONSTRUCTION THROUGH THE JOISTS OR AS CLOSE AS POSSIBLE TO THE JOISTS.

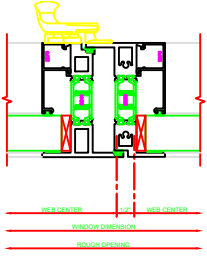


642 MEETING RAIL
 250
 CASSETTE OUT | PSED
 ON LOCK



401 JAMB
 250
 PSED



442 JAMB
 250
 CASSETTE OUT
 BUT PSED

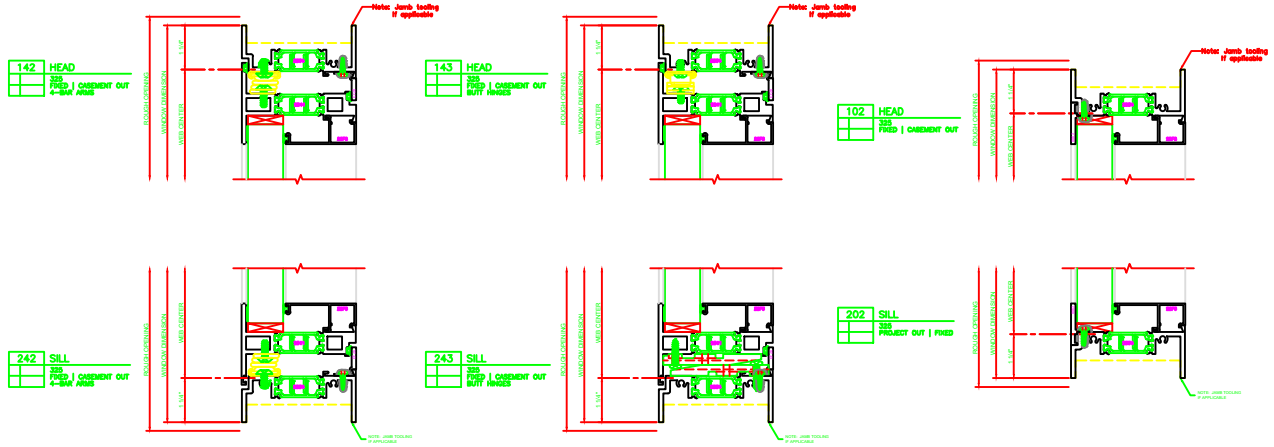

142 HEAD
 250
 PSED | CASSETTE OUT
 ON JAMB

143 HEAD
 250
 PSED | CASSETTE OUT
 ON JAMB

102 HEAD
 250
 PSED | CASSETTE OUT

242 SILL
 250
 PSED | CASSETTE OUT
 ON JAMB

243 SILL
 250
 PSED | CASSETTE OUT
 ON JAMB

202 SILL
 250
 PSED | CASSETTE OUT | PSED